

FIG. 1. Conceptual layout of TROPO. Gray lines represent vacuum inputs, i.e. zero average power.

The three equations of motion for this system are:

$$\begin{aligned}
 \dot{\alpha}_1 &= -(\gamma_1 + i\Delta_1)\alpha_1 - 2\sqrt{\mu_1\mu_2}\alpha_1^*\alpha_s\alpha_i - \mu_1|\alpha_1|^2\alpha_1 \\
 &\quad + \sqrt{2\gamma_1^c}A_1 \\
 \dot{\alpha}_{s,i} &= -(\gamma_{s,i} + i\Delta_{s,i})\alpha_{s,i} - \sqrt{\mu_1\mu_2}\alpha_1^2\alpha_{i,s}^* - 2\mu_2\alpha_s\alpha_i\alpha_{i,s}^*
 \end{aligned} \tag{1}$$

where α_1 , α_s , α_i are the fundamental, signal, and idler field amplitudes, respectively; γ_x and Δ_x are respectively the decay rate and detuning of mode x ; γ_1^c is the decay rate of the fundamental coupling mirror; μ_1 and μ_2 are the respective nonlinear interaction rates for SHG and NDOPO; and $A_1 = \sqrt{P_1/(h\nu)}$, where P_1 is the pump power, h is Planck's constant, and ν is the fundamental frequency.

We define the term $\gamma_x^{eff} = (\gamma_x + i\Delta_x)$ as the effective decay rate of mode x . To see why, consider the case of a singly resonant frequency doubler ($\mu_2 = 0$). Without loss of generality, we can assume that the pump rate, A_1 , is real. If the detuning, Δ_1 , is zero, then the field value, α_1 , is real. It is clear that the value of α_1 is limited by the total decay rate γ_1 : if γ_1 is large then the absolute value of α_1 will be small. Now consider non-zero detuning: the value of α_1 becomes complex and is limited by both the decay rate, γ_1 , and the detuning, Δ_1 . If the detuning is very large, then even when the decay rate is very small the absolute value of α_1 will be small. Thus the linear phase shift, $i\Delta_1$, introduced by detuning leads to a reduction of intensity, and can be said to effectively increase the decay rate of the cavity.

For zero detunings, the threshold power for competition is:

$$P_1^{thr} = h2\nu \frac{\bar{\gamma}}{\gamma_1^c} \frac{\gamma_1^2}{\sqrt{\mu_1\mu_2}} \frac{1}{4} \left(1 + r \frac{\bar{\gamma}}{\gamma_1}\right)^2 \quad (2)$$

where $\bar{\gamma} = \sqrt{\gamma_s\gamma_i}$ and $r = \sqrt{\mu_1/\mu_2}$. We introduce the scaled power $N = P_1/P_1^{thr}$. For the likely experimental optimum, $\gamma_s = \gamma_i = \gamma_1$, $\mu_1 = \mu_2$, we define a minimum threshold power, $P_1^{min} = h(2\nu)\gamma_1^2/(\eta\mu_1)$ where the cavity escape efficiency is $\eta = \gamma_1^c/\gamma_1$.

Obviously the threshold can be altered by changing the nonlinearities. Experimentally this is achieved via *phase matching*: i.e. altering the phase match in the nonlinear crystal by changing the orientation or temperature [4]. The threshold can also be altered via *dispersion matching*. That is, altering the laser frequency or cavity length so that the signal and idler modes are unable to be resonant with the fundamental. This corresponds to large signal and idler detunings but zero fundamental detuning. The altered threshold is then described by substituting absolute values of the effective decay rates, $|\gamma_x^{eff}|$, for all the decay rates in equation 2.

A detailed description of the experimental setup is given in [22]. In brief, the system is driven by a miniature diode pumped Nd:YAG ring laser (Lightwave 122) that produces a single mode of wavelength 1064 nm. A mode cleaning cavity acts as a low-pass filter to remove excess quadrature noise (both amplitude and phase) from the laser beam. The output of this drives the nonlinear cavity, which is a 12.5 mm long MgO:LiNbO₃ monolithic crystal with dielectric mirror coatings on the curved end faces ($R=14.24$ mm). The monolith is singly resonant at the fundamental; the second harmonic executes a double-pass through the crystal (residual second harmonic transmitted through the high reflector end is referred to as “single-pass”). The laser is locked to the monolith, and the mode cleaner is locked to the laser, via separate Pound-Drever locking schemes. The second harmonic is accessed via a low-loss dichroic, the reflected fundamental is accessed via the Faraday isolator - both beams are sent to either a balanced-homodyne pair and/or an optical spectrum analyser.

The obvious signature of competition in this system is production of nondegenerate frequency modes (when $N > 1$). When the monolith is repeatedly scanned through resonance, these modes cause distorted cavity lineshapes. The frequency of the modes is measured by inspecting the infrared field reflected from the monolith with a spectrometer. The signal & idler pair are found to be up to 31 nm from degeneracy ($\nu_{s,i} = 1033$ nm, 1095 nm). The non-degeneracy is limited by phase matching, dispersion, and mirror bandwidth (~ 40 nm centred at 1064 nm). Figure 2 shows, for scanned operation [17], the observed threshold power (curve a) and the single-pass and double-pass second harmonic power (curves b & c) as a function of the crystal temperature. Note that the threshold curve has two minima: roughly corresponding to maxima in the double pass and single pass power, respectively. In the latter case, even though minimal second harmonic is produced, the intracavity second harmonic field is large enough to pump the NDOPO.

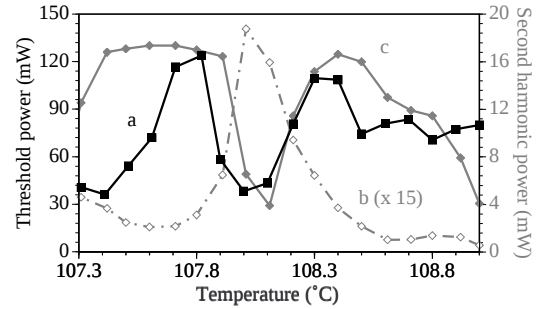


FIG. 2. (a) observed threshold power; (b) single-pass SH power (i.e. residual transmitted through high reflector) & (c) double-pass SH power (as shown in Fig. 1); as a function of crystal temperature (i.e. phase mismatch).

In locked operation the nondegenerate modes are observed via optical spectrum analysers. Figure 3a is the output of the infrared optical spectrum analyser for the laser only. Figure 3b is the output for the locked monolith just above threshold: note the strong conversion to signal and idler. The signal and idler mode-hop irregularly, the system operating stably for up to ten minutes at a time. Gross control is achieved by detuning the fundamental mode. As it is detuned around resonance, the effective decay rate of the fundamental does not change greatly, but, due to dispersion mismatch, the effective decay rates of the signal and idler can become very large. This shifts the threshold power above the operating power and suppresses the NDOPO, c.f. (2). Finer control has been achieved using a cavity with tunable dispersion, for example a semi-monolithic design where a translatable cavity mirror is external to the MgO:LiNbO₃ crystal [19]. Such improvements allow for stable operation with long intervals between mode hops.

Surprisingly, as the power is increased further two extra modes in the infrared, and four extra modes in the visible, are seen (Figures 3c,d). To the authors' knowl-

edge this is the first observation of extra modes around the second harmonic, and it strongly supports the mechanism proposed in [15] of cascaded second harmonic, sum and difference frequency generation between the signal, idler and pump fields. The extra modes in the visible are likely generated by SFG ($\nu + \nu_{s,i} = 2\nu \pm \Delta$) or SHG ($2\nu_{s,i} = 2\nu \pm 2\Delta$), whilst the extra pair in the infrared are from DFG with the visible modes ($\nu + \nu_{s,i} - \nu_{i,s} = 2\nu_{s,i} - \nu = \nu \pm 2\Delta$). Further modes appear in the infrared field with increasing power: this system holds great promise both as a source of frequency tunable light and for frequency measurement (e.g. as a precise frequency chain).

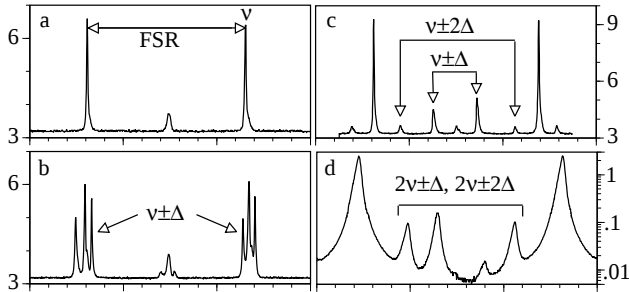


FIG. 3. Optical spectrum analyser outputs of the locked monolith. All traces are intensity versus frequency (arbitrary units). The small peak in the middle of the infrared traces is due to imperfect alignment. *infrared traces* (a) from laser for $P_1 = 32$ mW, FSR = free spectral range of the analyser; (b) from monolith for $P_1 = 14$ mW, note signal and idler modes; (c) from monolith for $P_1 = 49$ mW, note extra pair of modes; *visible trace* (d) from monolith for $P_1 = 155$ mW, the ordinate is logarithmic to highlight the four extra frequencies.

Another surprising signature of competition is clamping of the second harmonic power. From (1) we find that for $P_1 > P_1^{\text{thr}}$, the second harmonic power is:

$$P_2 = h2\nu \frac{\bar{\gamma}^2}{\mu_2} \quad (3)$$

i.e the power is clamped to its threshold value. Above threshold, “excess” pump power is reflected or converted to signal and idler. Similar behaviour has been predicted for the *optical limiter* [1]: a standing wave DOPO resonant at ν , which is single-pass pumped at 2ν . The 2ν field in both cases sees three input/output ports, however the clamping is due to different mechanisms: competing $\chi^{(2)}$ nonlinearities in our system; cooperating $\chi^{(2)}$ nonlinearities in the limiter.

The conversion efficiency at threshold is given by $\epsilon = P_2/P_1^{\text{thr}}$. The minimum threshold, P_1^{min} , is the point of maximum conversion efficiency, with a value equal to the cavity escape efficiency, $\epsilon = \gamma_1^c/\gamma_1 = \eta$. For unity cavity escape efficiency, $\eta = 1$, P_1^{min} is also the impedance matching point of the cavity.

Figure 4 shows experimental curves of second harmonic versus fundamental power for two different detunings.

In curve (a) the second harmonic power is clamped at 23 mW at a threshold power of 41 mW. This threshold is much higher than the observed minimum threshold, $P_1^{\text{min}} = 14.3$ mW, as the signal and idler modes see high cavity losses due to dispersive mismatch. In curve (b) the monolith is tuned towards resonance so that the effective fundamental decay rate is lower than in curve (a), however the detuning increases the dispersive mismatch, and thus $\gamma_{s,i}$, suppressing the NDOPO and moving the threshold to 54 mW.

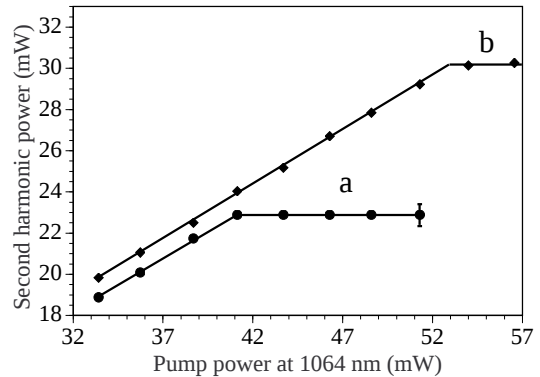


FIG. 4. Second harmonic power versus fundamental power curves for two different detunings, (a) & (b). The systematic error bar is shown. All power measurements are NIST traceable with an absolute error of 7%.

This has important consequences when designing nonlinear optical systems. Clamping is undesirable in many applications, such as frequency doubling to form a high power light source. With the development of low dispersion, efficient nonlinear cavities, clamping is expected to become a widely observed phenomenon. In the past year alone it has been observed in systems with competing SHG and NDOPO [18–20] and in an optical limiter formed by an OPO intracavity with a laser [21]. It can be suppressed via tunable dispersion, or avoided entirely by designing the system so that the minimum threshold point occurs at a power higher than maximum pump power. Ideally clamping shouldn’t occur in many frequency doublers as they are optimised for maximum conversion efficiency, i.e. pumped at P_1^{min} . However in practice, many doublers are optimised by pumping them at powers above P_1^{min} . This is done because for powers less than P_1^{min} the conversion efficiency falls off very steeply: small variations in fundamental power lead to large variations in harmonic power. However above P_1^{min} the conversion efficiency falls off very slowly: the harmonic power is much more robust to small variations in the fundamental power. It is exactly this regime which is prone to competition.

Naturally, competition also has quantum signatures. It has been suggested that, as the vacuum modes at $\nu_{s,i}$ are correlated by the NDOPO for $N < 1$, then competition could be observed as squeezing of the reflected pump field

FIG. 5. Theoretical squeezing spectra for the case $P_1^{\text{thr}} = P_1^{\text{min}}$. (a) $N = 1.001$ (b) $N = 1.25$ and (c) $N = 3$.

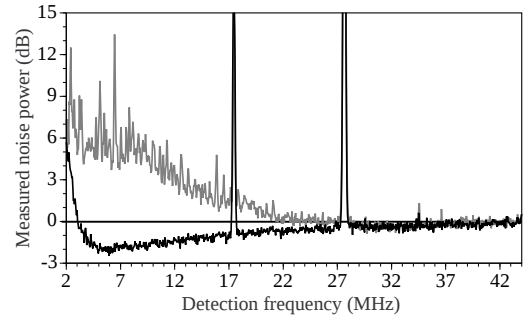


FIG. 6. (a) Squeezing spectra. (a) Without competition, $P_1 = 74$ mW (b) With competition, $P_1 = 60$ mW.

Figure 6a shows the experimentally observed squeezing in the absence of competition, which is suppressed via detuning as discussed earlier. Below 6 MHz the squeezing degrades due to laser pump noise [22], above 6 MHz the squeezing is as expected from theory with $V_1^{\text{in}} = 1$. The spikes at 17 and 27 MHz are from the locking signals. With competition, and at a lower pump power, the spectrum changes to that shown in Figure 6b. As predicted, there is considerable excess noise at low frequencies, whilst the degradation at higher frequencies is more gradual. The excess noise at low frequencies is greater than that shown in Fig. 5 due to presence of numerous, overlapping, noise spikes. The spikes are due to a

locking instability in the modecleaner which is driven by competing locking signals. It is clear that even a small amount of χ^2 competition leads to a marked degradation in the squeezing. This previously unexpected limit to squeezing can only be avoided by designing the system so that competition is suppressed when the pump power is greater than the maximum conversion efficiency power. One solution is a cavity with such high dispersion that the signal and idler modes are unable to become simultaneously resonant with the fundamental: high second harmonic squeezing has been seen in such a system [29].

In conclusion, competition between SHG and NDOPO in a monolithic cavity has been observed to cause generation of new frequencies in both the visible and infrared fields, clamping of the second harmonic power, and degradation of the second harmonic squeezing. Competition imposes a previously unsuspected limit to squeezing and power generation. The reported signatures are expected to be commonly observed in efficient, low dispersion systems, unless explicit steps are taken to avoid competition.

We wish to acknowledge fruitful discussions with M. Collett, C. Savage, E. Polzik, J. Hall and B. Byer. AGW wishes to thank J. Mlynek for the use of crystal #19 for the unlocked measurements. The ANU crystal was cut and polished by CSIRO, Sydney, Australia. The coatings were provided by LZH, Hannover, Germany. This work was supported by the Australian Research Council. MM was supported by the APART programme of the Austrian Academy of Sciences.

- [15] S. Schiller, G. Breitenbach, R. Paschotta, and J. Mlynek, Appl. Phys. Lett. **68**, 3374 (1996)
- [16] M. A. M. Marte, Phys. Rev. Lett. **74**, 4815 (1995); M. A. M. Marte, Acta Physica Slovaca **45**, 253 (1995); M. A. M. Marte, J. Opt. Soc. Am. B **12**, 2296 (1995)
- [17] The scanned measurements were performed by AGW at Konstanz Universität, Germany using crystal #19.
- [18] A. G. White, P. K. Lam, M. S. Taubman, T. C. Ralph, S. Schiller, D. E. McClelland, and H.-A. Bachor, in *Proceedings of the 1996 Les Houches Workshop on $\chi^{(2)}$ Nonlinearities*, J. Quant. Semiclass. Opt. (to be published)
- [19] K. Schneider and S. Schiller, Opt. Lett., (in press 1997)
- [20] J. Sorensen, E. Polzik, and J. Ostergaard, Aarhus University, Denmark, (private communication)
- [21] F. G. Colville, M. H. Dunn, and M. Ebrahimzadeh, (submitted to Opt. Lett., 29 Aug. 1996)
- [22] A. G. White, M. S. Taubman, T. C. Ralph, P. K. Lam, D. E. McClelland, and H.-A. Bachor, Phys. Rev. A, **54**, 3400 (1996)
- [23] R. Paschotta, M. Collett, P. Kürz, K. Fiedler, H.-A. Bachor and J. Mlynek, Phys. Rev. Lett. **72**, 3807 (1994)
- [24] S. Schiller, R. Bruckmeier, and A. G. White, Opt. Comm., to appear, 1997
- [25] M. S. Taubman, H. Wiseman, D. E. McClelland and H.-A. Bachor, J. Opt. Soc. Am. B **12**, 1792 (1995)
- [26] M. Collett, Auckland University, New Zealand (unpublished)
- [27] M. Gray, Australian National University, Australia (private communication)
- [28] J. J. Slosser and G. J. Milburn, Phys. Rev. A, **50**, 793 (1994)
- [29] H. Tsuchida, Opt. Lett., **20**, 2240 (1995)

-
- [1] A. E. Siegman, Appl. Opt. **1**, 739 (1962)
 - [2] for example, see references in: G. Assanto, G.I. Stegeman, M. Sheik-Bahae, and E. VanStryland, J. Quant. Elec. **31**, 673 (1995)
 - [3] G. Stegeman, M. Sheik-Bahae, E. W. Van Stryland and G. Assanto, Opt. Lett. **18**, 13 (1993)
 - [4] A. G. White, S. Schiller, J. Mlynek, Europhys. Lett., **35**, 425 (1996)
 - [5] Z. Y. Ou, Opt. Commun. **124**, 430 (1996)
 - [6] P. L. Chu, B. A. Malomed, and G. D. Peng, Opt. Comm. **128**, 76 (1996)
 - [7] G. T. Moore, and K. Koch, IEEE Journ. Quant. Elec. **29**, 961 (1993)
 - [8] E. C. Cheung, K. Koch, and G. T. Moore, Opt. Lett. **19**, 1967 (1994)
 - [9] K. Koch, G. T. Moore, and E. C. Cheung, J. Opt. Soc. Am. B **12**, 2268 (1995)
 - [10] R. Byer, Ginzton Laboratory, Stanford University, U.S.A., (private communication)
 - [11] S. Schiller and R. L. Byer, J. Opt. Soc. Am. B **10**, 1696 (1993)
 - [12] M. A. M. Marte, Phys. Rev. A **49**, 3166 (1994)
 - [13] G. T. Moore, K. Koch, and E. C. Cheung, Opt. Comm. **113**, 463 (1995)
 - [14] S. Schiller, G. Breitenbach, S. F. Pereira, R. Paschotta, A. G. White and J. Mlynek, Proc. SPIE **2378**, Y. Shevy ed., 91 (1995)